




VOLUME FLOW LIMITER
TYPE VFL



TESTED TO VDI 6022



INSERT



SET THE VOLUME FLOW
RATE



STICKER SHOWING
VOLUME FLOW RATES



AERODYNAMIC DAMPER
BLADE

VFL

VOLUME FLOW LIMITER FOR INSERTION INTO DUCTING

Circular, mechanical self-powered controllers for insertion into ducting, for the quick and easy balancing of constant volume flow rates in ventilation and air conditioning systems

- Unique damper blade edge for acoustic optimisation
- Simple and quick commissioning on site
- Range of volume flow rate setpoints for each nominal size
- Precise and simple setting of volume flow rates using a scale
- Best accuracy among controllers for insertion
- Suitable for low airflow velocities from 0.8 m/s
- Any installation orientation; maintenance-free

Application



Application

- Circular volume flow limiters of Type VFL for the simple balancing of volume flow rates in air conditioning systems
- Mechanical self-powered volume flow limiter without external power supply
- Simplified project handling with orders based on nominal size
- Set the required volume flow rate using a scale

Special features

- Mechanical self-powered
- Low-friction bellows
- For circular ducts
- Lip seal for tight and secure fit
- Aerodynamically tested and factory set to a reference volume flow rate
- Sticker showing volume flow rates (in l/s, m³/h and cfm) that can be set each limiter

Nominal sizes

- 80, 100, 125, 150, 160, 200, 250

Description



Parts and characteristics

- Ready-to-commission limiter
- Damper blade with low-friction bearings
- Bellows that acts as an oscillation damper
- Leaf spring
- Lip seal
- Multi-level volume flow rate setpoint values

Construction features

- Circular casing
- Suitable for insertion into circular ducts to EN 1506 or EN 13180
- Lip seal for tight and secure fit
- Acoustically optimised damper blade with low-friction bearings and special bellows
- Different damper blade construction and volume flow rate sticker for nominal size 150

Materials and surfaces

- Casing and damper blade made of high-quality plastic, to UL 94, V0; to DIN 4102, material classification B2
- Leaf spring made of stainless steel
- Polyurethane bellows

Standards and guidelines

- Hygiene conforms to VDI 6022

Maintenance

- Maintenance-free as construction and materials are not subject to wear

TECHNICAL INFORMATION

Function, Technical data, Quick sizing, Specification text, Order code, Produktbeziehungen

Functional description

The volume flow limiter is a mechanical self-powered unit and works without external power supply. A damper blade with low-friction bearings is adjusted by aerodynamic forces such that the set volume flow rate is limited as a consequence.


The aerodynamic forces of the airflow create a closing torque on the damper blade. The bellows extends and increases this force while at the same time acting as an oscillation damper. The closing force is countered by a leaf spring. As the differential pressure changes, the leaf spring adjusts the position of the damper blade such that the volume flow rate is limited.

Efficient commissioning

The volume flow limiter performs the previously tedious and expensive balancing of volume flow rates in ventilation and air conditioning systems.

Simple handling and perfect function help to save valuable working time on site. The required volume flow rate can be set at the point of installation, then the volume flow limiter is inserted into the duct. The set volume flow rate will then be limited and maintained within close tolerances.

Schematic illustration of the VFL

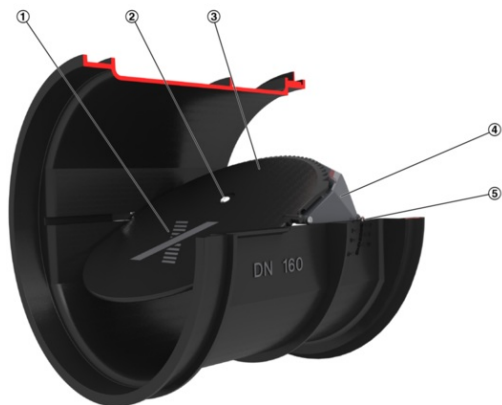

- ① Damper blade
- ② Bellows inlet
- ③ Bellows
- ④ Crossbar
- ⑤ Volume flow rate scale

Volume flow rate ranges

The volume flow limiters are factory set to the reference volume flow rate V_{ref} . Customers can then simply set the required volume flow rate (setting values 1 to 11).

Nominal sizes	80 – 250 mm
Volume flow rate range	4 – 212 l/s or 14 – 764 m³/h
Volume flow rate control range	< 20 – 100 % of the nominal volume flow rate
Volume flow rate accuracy	approx. ± 10 % of the nominal volume flow rate
Minimum differential pressure	30 Pa
Maximum differential pressure	300 Pa
Operating temperature	10 – 50 °C

Quick sizing tables provide a good overview of the room sound pressure levels that can be expected. Approximate intermediate values can be interpolated. Precise intermediate values and spectral data can be calculated with our Easy Product Finder design programme.

The first selection criteria for the nominal size are the actual volume flow rates V_{min} and V_{max} . The quick sizing tables are based on generally accepted attenuation levels. If the sound pressure level exceeds the required level, a larger air terminal unit and/or a silencer is required.

VFL, Sound pressure level at differential pressure 50 Pa

Nominal size	V		Air-regenerated noise
	LpA		
Nominal size	l/s	m³/h	dB (A)
80	4	14	30
	6	22	30
80	14	50	32
	20	73	33
80	23	82	34
100	5	18	31
	11	39	33
100	16	58	35
	26	92	36
100	34	122	37
125	11	39	36
	19	69	37
125	27	98	37
	42	150	38

125	54	195	39
150	14	50	32
	29	105	32
150	44	160	33
	57	205	33
150	74	265	34
160	16	58	26
	28	102	29
160	49	175	32
	67	242	34
160	90	323	36
200	26	94	23
	70	253	27
200	109	391	30
	134	481	31
200	147	529	31
250	44	159	23
	94	337	26
250	144	519	28
	175	632	28
250	212	764	28

Circular volume flow limiters in 7 nominal sizes, made of high-quality plastic, to limit and control volume flows in air conditioning systems.

Ready-to-commission unit which consists of the casing with setpoint scale and the control mechanism with leaf spring and low-friction, silicone-free bellows.

Easy insertion into circular ducts to EN 1506 or EN 13180; secure fit ensured by a lip seal.

Aerodynamically tested and factory set to a reference volume flow rate. Can be subsequently accurately adjusted within a volume flow rate range of at least 5 : 1.

Special features

- Mechanical self-powered
- Low-friction bellows
- For circular ducts
- Lip seal for tight and secure fit
- Aerodynamically tested and factory set to a reference volume flow rate
- Sticker showing volume flow rates (in l/s, m³/h and cfm) that can be set each limiter

Materials and surfaces

- Casing and damper blade made of high-quality plastic, to UL 94, V0; to DIN 4102, material classification B2
- Leaf spring made of stainless steel
- Polyurethane bellows

Technical data

- Nominal sizes: 80 – 250 mm
- Volume flow rate range: 4 to 212 l/s or 14 to 764 m³/h
- Volume flow rate control range: < 20 to 100 % of the nominal volume flow rate
- Volume flow rate accuracy: approx. ± 10 % of the nominal volume flow rate
- Minimum differential pressure: 30 Pa
- Maximum differential pressure: 300 Pa

Sizing data

- V _____ [m³/h]
- Δp_{st} _____ [Pa]

Air-regenerated noise

- L_{PA} _____ [dB(A)]

Life cycle assessment

A life cycle assessment is available for the product series in form of an Environmental Product Declaration (EPD) that has been checked and published by a programme holder.

Order example: VFL/100

Nominal size	100 mm
--------------	--------

VFL / 100

1


2

1 Type	2 Nominal size [mm]
VFL	Volume flow limiter
	80
	100
	125
	150
	160
	200
	250


Dimensions and weight, Product details



VFL

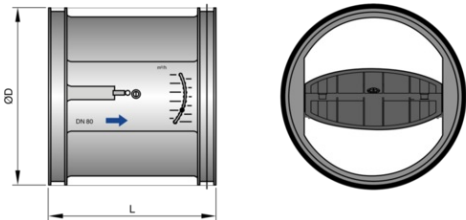

Set

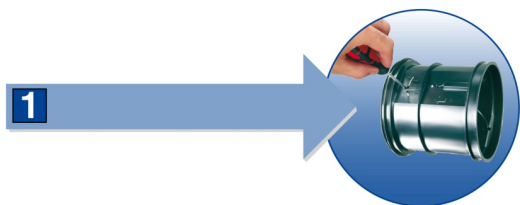

Installation details, Basic information and nomenclature



Installation and commissioning

- Any installation orientation
- Set the required volume flow rate using a scale
- Insert the unit into the duct
- Mark the installation location

Upstream conditions


The volume flow rate accuracy ΔV applies to a straight upstream section of the duct. Bends, junctions or a narrowing or widening of the duct cause turbulence that may affect measurement. Duct connections, e.g. branches off the main duct, must comply with EN 1505. Some installation situations require straight duct sections upstream.

Free air intake only with a straight duct section of 1D upstream.

Space required for commissioning and maintenance


Sufficient space must be kept clear near any attachments to allow for commissioning and maintenance. It may be necessary to provide sufficiently sized inspection access openings.

Bend

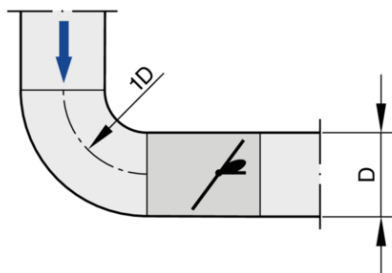

A bend with a curvature radius of at least 1D – without an additional straight duct section upstream of the volume flow limiter – has only a negligible effect on the volume flow rate accuracy.

Junction

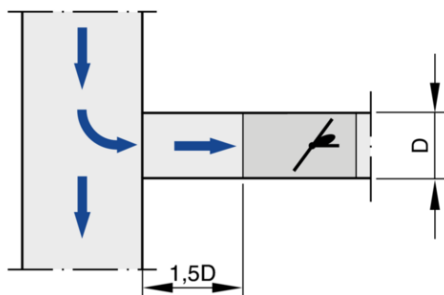

A junction causes strong turbulence. The stated volume flow rate accuracy ΔV can only be achieved with a straight duct section of at least 1.5D upstream. Shorter upstream sections require a perforated plate in the branch and before the volume flow limiter. If there is no straight upstream section at all, the control will not be stable, even with a perforated plate.

Principal dimensions

ØD [mm]

Outside diameter of the spigot

ØD₁ [mm]

Pitch circle diameter of flanges

ØD₂ [mm]

Outside diameter of flanges

ØD₄ [mm]

Inside diameter of the screw holes of flanges

L [mm]

Length of unit including connecting spigot

L₁ [mm]

Length of casing or acoustic cladding

B [mm]

Duct width

B₁ [mm]

Screw hole pitch of flange (horizontal)

B₂ [mm]

Outside dimension of flange (width)

B₃ [mm]

Width of device

H [mm]

Duct height

H₁ [mm]

Screw hole pitch of flange (vertical)

H₂ [mm]

Outside dimension of flange (height)

H₃ [mm]

Unit height

n []

Number of flange screw holes

T [mm]

Flange thickness

m [kg]

Unit weight including the minimum required attachments for manual adjustment

Acoustic data

f_m [Hz]

Octave band centre frequency

L_{PA} [dB(A)]

A-weighted sound pressure level of air-regenerated noise of the VAV terminal unit, system attenuation taken into account

L_{PA1} [dB(A)]

A-weighted sound pressure level of air-regenerated noise of the VAV terminal unit with secondary silencer, system attenuation taken into account

L_{PA2} [dB(A)]

A-weighted sound pressure level of case-regenerated noise of the VAV terminal unit, system attenuation taken into account

L_{PA3} [dB(A)]

A-weighted sound pressure level of case-regenerated noise of the VAV terminal unit with acoustic cladding, system attenuation taken into account

All sound pressure levels are based on 20 µPa.

Volume flow rates**V_{nom} [m³/h] and [l/s]**

Nominal volume flow rate (100 %)

- The value depends on product type and nominal size
- Values are published on the internet and in technical leaflets, and stored in the Easy Product Finder design software.
- Upper limit of the setting range and maximum volume flow rate setpoint value for the CAV controller

V [m³/h] and [l/s]

Volume flow rate

ΔV [± %]

Volume flow rate tolerance from setpoint value

Differential pressure**Δp_{st} [Pa]**

Static differential pressure

Δp_{st min} [Pa]

Static differential pressure, minimum

- The static minimum differential pressure is equal to the pressure loss of the CAV controller when the damper blade is open, caused by flow resistance (bellows, crossbar)
- If the pressure on the CAV controller is too low, the setpoint volume flow rate may not be achieved, not even when the damper blade is open
- Important factor in designing the ductwork and in rating the fan including speed control
- Sufficient duct pressure must be ensured for all operating conditions and for all controllers, and the measurement point or points for speed control must have been selected accordingly to achieve this

Construction**Galvanised sheet steel**

- Casing made of galvanised sheet steel
- Parts in contact with the airflow as described for the product type
- External parts, e.g. mounting brackets or covers, are usually made of galvanised sheet steel


Powder-coated surface (P1)

- Casing made of galvanised sheet steel, powder-coated RAL 7001, silver grey
- Parts in contact with the airflow are powder-coated or made of plastic
- Due to production, some parts that come into contact with the airflow may be stainless steel or aluminium, powder-coated
- External parts, e.g. mounting brackets or covers, are usually made of galvanised sheet steel

Stainless steel (A2)

- Casing made of stainless steel 1.4201
- Parts in contact with the airflow are powder-coated or made of stainless steel
- External parts, e.g. mounting brackets or covers, are usually made of galvanised sheet steel

Definition of noise

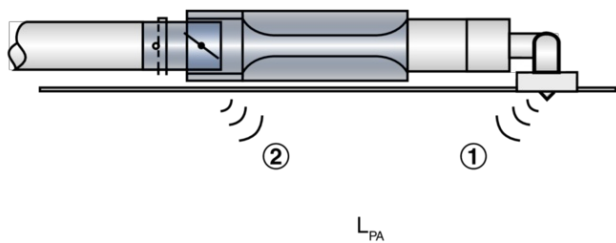

- ① Air-regenerated noise
- ② Case-radiated noise

Static differential pressure

