

...



TNC-70413



TNC-A4000



TNC-70413



TNC-70113



TNC-DP CONNECTOR



TNC-70413

END SEALS TO PROTECT THE ENDS OF FLAT CABLES

All products are of high quality and meet the requirements of ASI-Interface


- Asymmetrically shaped cable to ensure error-free connection (reverse voltage protection)
- Easy wiring due to flat cable insulation displacement connectors ('click and go')
- Protection level up to IP 67

Application

- To prevent short circuits, cable ends (bare wire ends) should be protected from moisture and from accidental contact
- Protect cable ends with an end seal (TNC-70413) or with a heat shrink cap (TNC-70113)

TECHNICAL INFORMATION

AS-i installation TNC-70413

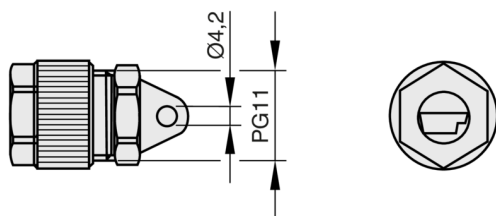

Description	TNC-70413
Temperature range	-20 to 70 °C
Casing	ULTRAMID; seal: NBR
Protection level	IP 67
Tightening torque	2 Nm

Standard description (characteristics)

End seal to protect the ends of flat cables, TNC-70413.

- Casing materials: ULTRAMID; seal: NBR
- Ambient temperature: -20 to 70 C°
- Make: TROX GmbH or equivalent
- Type: TNC-70413

TNC – A4000



1

1 Useful additions

TNC-A4000 Flat cable (100 m)

TNC-70381 Flat cable distributor

TNC-70413 End seals (10 pieces)

TNC-70113 Heat shrink caps (10 pieces)

TNC-70067 Cable clips for flat cables
(100 pieces)

TNC-DP connector