



TLH

- Excellent induction
- Versatile positioning
- Suitable as a ceiling, wall and riser diffuser
- Installed directly in ductwork or groove – no tools required

APPLICATION ^

TLH is a basic supply diffuser for wall, ceiling or riser installation.

Design

TLH features a perforated front and a connection collar fitted with a wide rubber gasket for installation directly in duct or groove without additional fastening devices.

DESCRIPTION ∨

Materials and surfaces


TLH is made of steel, and comes in a RAL 9003 - gloss 30 finish with EPDM rubber gasket fitted as standard.

INSTALLATION ∨

TLH is installed directly in to duct as shown in fig. 3 or in groove with an equivalent inside diameter, and is secured by using a press-and-twist method. The diffuser is removed by reversing the action, i.e. twist and pull.

INFORMATION TECHNIQUE

ORDER CODE, TLH

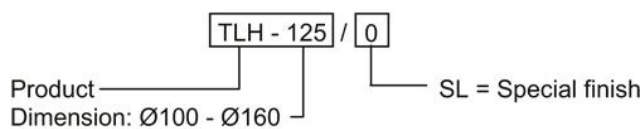

Example:

TLH-125 / 0

Explanation:

TLH supply diffuser dim. Ø125.

 QUICK SELECTION

TLH	[m ³ /h]		
Dim.	25 dB(A)	30 dB(A)	35 dB(A)
100	58	72	86
125	108	130	155
160	194	230	274

TROX Belgium N.V.



Paepsem Business Park
Boulevard Paepsem 18G
1070 Bruxelles
Tel: +0032 (0)2/522.07.80
Fax: +0032 (0)2/520.21.78

Online-Services

- > [TROX Academy](#)

- > [Votre contact](#)

- > [Formulaire de contact en ligne](#)

- > [Recherche Produit A-Z](#)

- > [Formulaire de demande du Tarif](#)

Service-Hotlines

TROX Belgium
+32 (0) 2/522.07.80
[Contact](#)